

**HUSKY®**

# BEVERAGE CLOSURE MATRIX


A Pocket Reference



# PURPOSE

The purpose of this leaflet is to provide a current overview of Husky's beverage closure matrix portfolio. Note that this matrix is constantly evolving and is current as of this writing (September 2024). Contact your local Husky Solutioning Lead or Matrix Closure Product Manager for additional performance specifications related to any of the closures identified herein.

# SELECT YOUR APPLICATION

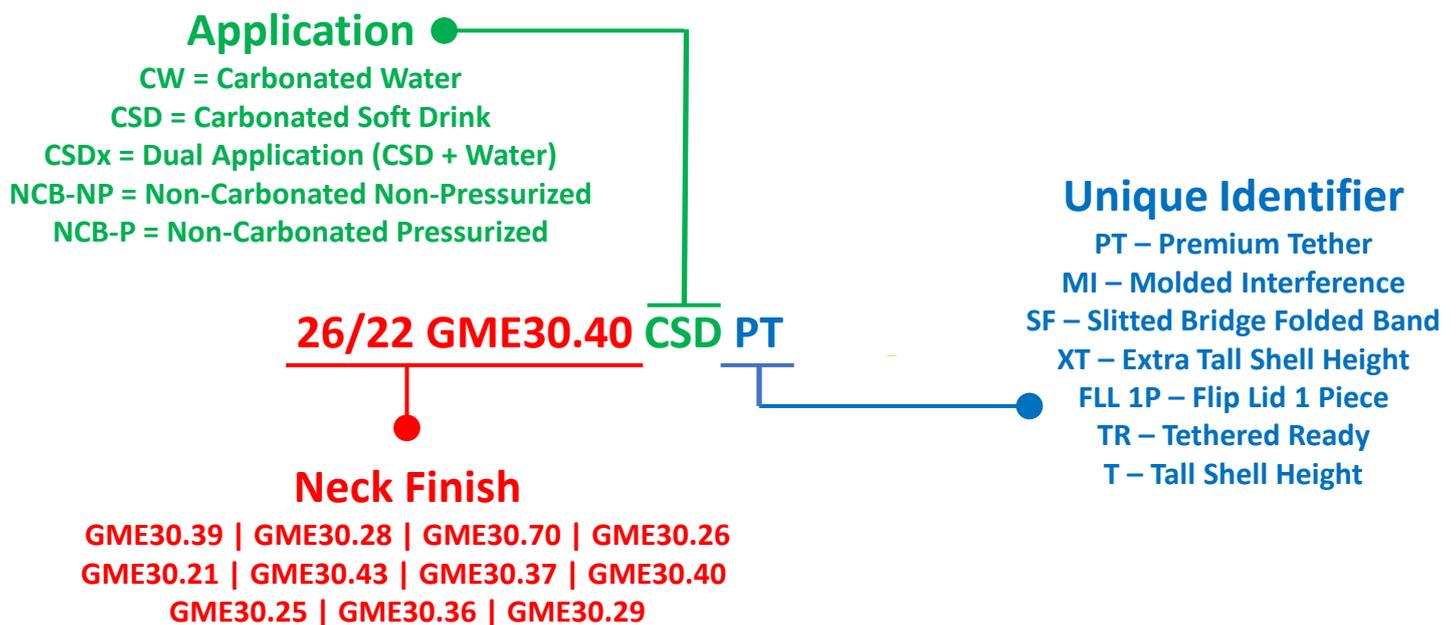


# BEVERAGE CLOSURE MATRIX

Nominal Diameter	Neck Finish	Est. Neck Finish Weight	Water Closures	CSD Closures	Sensitive Closures	
22mm (ASSP)	ASSP (Not a GME Standard)	2.13g		 ASSP 22mm CSD MI		
25mm (25/22)	GME30.39	1.00 g	 GME30.39 NCB MI			
	MOD GME30.39	1.15 g	 MOD GME30.39 NCB MI			
26/22	GME30.28	1.78 g	 GME30.28 NCB SF			
	GME30.37 z=29 mm z=31 mm	2.30 g 2.43 g		 GME30.37 CSD MI T		
				 GME30.37 CSD MI T		
	GME30.41 z=33 mm z=31.5 mm z=30.2 mm	2.51 g 2.41 g 2.33 g	 GME30.41 CSD MI T			
	GME30.40 z=33 mm z=31.5 mm z=30.2 mm	2.70 g 2.61 g 2.53 g		 GME30.40 CSD TR		
				 GME30.40 CSD PT		
				 GME30.40 CSD MI		
				 GME30.40 CSD PT T		

Nominal Diameter	Neck Finish	Est. Neck Finish Weight	Water Closures	CSD Closures	Sensitive Closures
26/22	GME30.40			 GME30.40 CSD TR	
				 GME30.40 CSD PT	
				 GME30.40 CSD PT	
28mm (1881)	GME32.04	3.81 g	 PC01881 NCB MI		
				 PC01881 CSD MI	
				 PC01881 CSD MI	
				 PC01881 CSD MI	
				 PC01881 CSD MI	
				 PC01881 CSDx PT	

Nominal Diameter	Neck Finish	Est. Neck Finish Weight	Water Closures	CSD Closures	Sensitive Closures
28mm (1881)	GME32.04	3.81 g			
				PC01881 CSDx PT	
28mm (1810)	GME32.03	5.10 g			
				PC01810 CSD MI	
26/21 Snap	GME30.70	1.28 g			
			GME30.70 FLL 1P		
29/25 Snap-On 25	Not yet a CETIE standard	1.35 g			
			29/25 FLL 1P		
29/25	GME30.26	2.41 g & 2.21g			
			GME30.26 NCB MI		
					
			GME30.26 NCB MI		
					
			GME30.26 NCB PT (PRO)		
					
			GME30.26 NCB PT (NPRO)		

Nominal Diameter	Neck Finish	Est. Neck Finish Weight	Water Closures	CSD Closures	Sensitive Closures
29/25	GME30.26	2.41 g & 2.21 g	 <p>Shoulder = R3      Shoulder = R1.5</p> <p>GME30.26 NCB MI T</p>		
			 <p>GME30.26 NCB MI XT</p>		
			 <p>GME30.26 NCB PT XT (PRO)</p>		
			 <p>GME30.26 NCB PT XT (NPRO)</p>		
30/25	GME30.21	3.65 g	 <p>GME30.21 NCB MI</p>		
			 <p>90 Knurl      72 Knurl</p> <p>GME30.21 NCB MI</p>		
			 <p>GME30.21 NCB PT (NPRO)</p>		
			 <p>GME30.21 NCB PT (PRO)</p>		
32mm	GME30.36	3.30 g			 <p>GME30.36 NCB MI</p>

Nominal Diameter	Neck Finish	Est. Neck Finish Weight	Water Closures	CSD Closures	Sensitive Closures
32mm	GME30.36	3.30 g			 GME30.36 NCB MI
38mm	GME30.25	4.34 g			 GME30.25 NCB MI
					 GME30.25 NCB PT (PRO)
				 GME30.25 NCB PT (NPRO)	
	GME30.29	4.81 g			 GME30.29 NCB MI
48mm	GME30.43	9.17 g	 GME30.43 NCB MI		

# TECHNOLOGY SOLUTION



HyCAP™4 is the industry's only fully integrated beverage closure system designed and built to work together for increased productivity, energy efficiency and ease of use.



### Increased Productivity

Technologies to prevent resin contamination AND quickly resolve plugged cavities, maintains high levels of productivity.



### Energy Efficiency

Technologies to harvest, reduce, and repurpose energy to provide up to 40% savings without sacrificing cycle performance.



### Ease of Use

Built-in mold intelligence simplifies user operation, improves repeatability, and increases overall part quality.

Tonnage	Injection Unit (Throughput)		
	RS50 (125 kg/h)	RS60 (175 kg/h)	RS70 (225 kg/h)
225T	•	•	
300T	•	•	•
400T		•	•
500T			•

Cavitation	Tonnage			
	225T	300T	400T	500T
24 cav SP	•			
24 cav LP	•	•		
32 cav SP	•	•		
32 cav LP	•	•	•	
48 cav SP	•	•	•	
48 cav LP		•	•	
64 cav SP		•	•	•
64 cav LP			•	•
72 cav SP		•	•	•
72 cav LP				•
96 cav SP		•	•	•

# GLOBAL CONTACTS



## Solutioning Contacts

### Americas

Mr. James Rodrigues  
jrodrigues@husky.ca  
+416 420 7874

### EMEA

Mr. Jean-Michel Cunche  
jmcunche@husky.ca  
+352 621 269 437

### ASIA

Mr. Dave Gu  
dagu@husky.ca  
+86 136 119 84531

# HUSKY<sup>®</sup>

Husky Technologies™  
husky.co

Head Office  
Asia Pacific  
Europe

Canada • Tel (905) 951 5000 • Fax (905) 951 5384  
China • Tel (86) 21 2033 1000 • Fax (86) 21 5048 4900  
Luxembourg • Tel (352) 52 11 51 • Fax (352) 52 60 10

Husky Technologies™ is a registered trade-mark of Husky Technologies™ in the United States and other countries, and may be used by certain of its affiliated companies under License. All HUSKY products or service names or logos referenced in these materials are trade-marks of Husky Technologies™ and may be used by certain of its affiliated companies under License.

© 2025 Husky Technologies™. All rights are reserved.

Disclaimer: Information is made available in this flyer "as is" and no warranties are given or liabilities of any kind are assumed with respect to the quality of such Information, including, but not limited to, its fitness for a purpose, non-infringement of third party rights, accuracy, completeness or its correctness. Except as set forth in Husky's written warranty, Husky makes no additional warranties, whether express, implied or statutory. Certain conditions may apply. For more details please request a copy of Husky's written warranty and Standard Terms and Conditions.\*