
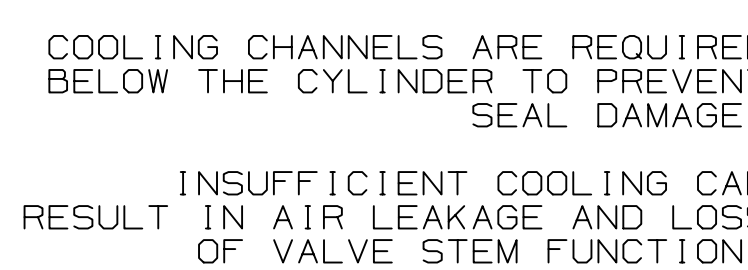
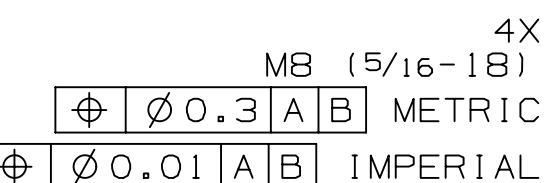


DRAWING	REV
8004703	2

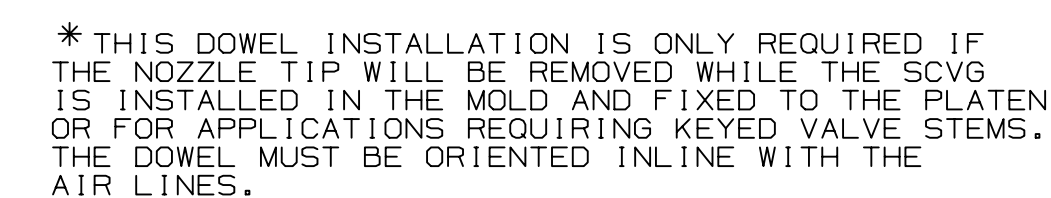

\*Approx. BL VALUES IN THE TABLE ARE REFERENCES WHICH CAN DEVIATE BY +/-1mm.  
FINAL BL VALUE CAN BE FOUND ON GATE DETAIL DRAWING AND 3D AFTER FINISHED DESIGN.  
BL AVAILABLE IN THE INCREMENT OF 10mm WITHIN RANGE.

U500	LOCATING RING DIAMETER
	100
	101.3 { 3.99 }
	125

**RECOMMENDED GATE COOLING GUIDELINES**  
ADEQUATE COOLING IS ESSENTIAL FOR  
THE PROPER FUNCTION OF THIS SYSTEM.  
REFER TO THE HOT RUNNER PRODUCT GUIDE  
[www.husky.ca](http://www.husky.ca)  
FOR MORE DETAILED GUIDELINES.

[S] H13 (49-5) Rc)  
[S] 420 (49-5) Rc)

- HARDENED GATE INSERTS (49-51) ARE RECOMMENDED WHEN USING SOFTER CAVITY STEELS. SOFTER CAVITIES MAY BE ACCEPTABLE FOR CERTAIN APPLICATIONS, CONTACT YOUR HUSKY REPRESENTATIVE WITH QUESTIONS.
- EDM'ING THE GATE AREA CAUSES MICRO CRACKS WHICH LEAD TO BRITTLE GATE FAILURES. ALSO - DO NOT EDM THE MOLDING SURFACE WITHIN 2mm OF THE GATE HOLE.

- MACHINE THE GATE HOLE AFTER HARDENING TO AVOID EXCESSIVE QUENCH IN THE THIN SECTION DURING HEAT TREAT & RESULTING OVERHARDENING IN THE GATE AREA.

- RECESSED GATES ON THE PRODUCT REDUCE THE GATE AREA STRENGTH LEADING TO GATE FAILURE
- WELDING THE GATE AREA INCREASES STRESSES AT THE GATE, SOFTENS THE AREA AROUND THE WELD AND CAN CAUSE GATE FAILURES.

**HUSKY**

TITLE  
SCVG  
Single Cavity Valve Gate  
11500-SCVG-VG

SCALE 1:1	SIZE	DRAWING	
SHEET 1 OF 2	AOR	8094793	

