
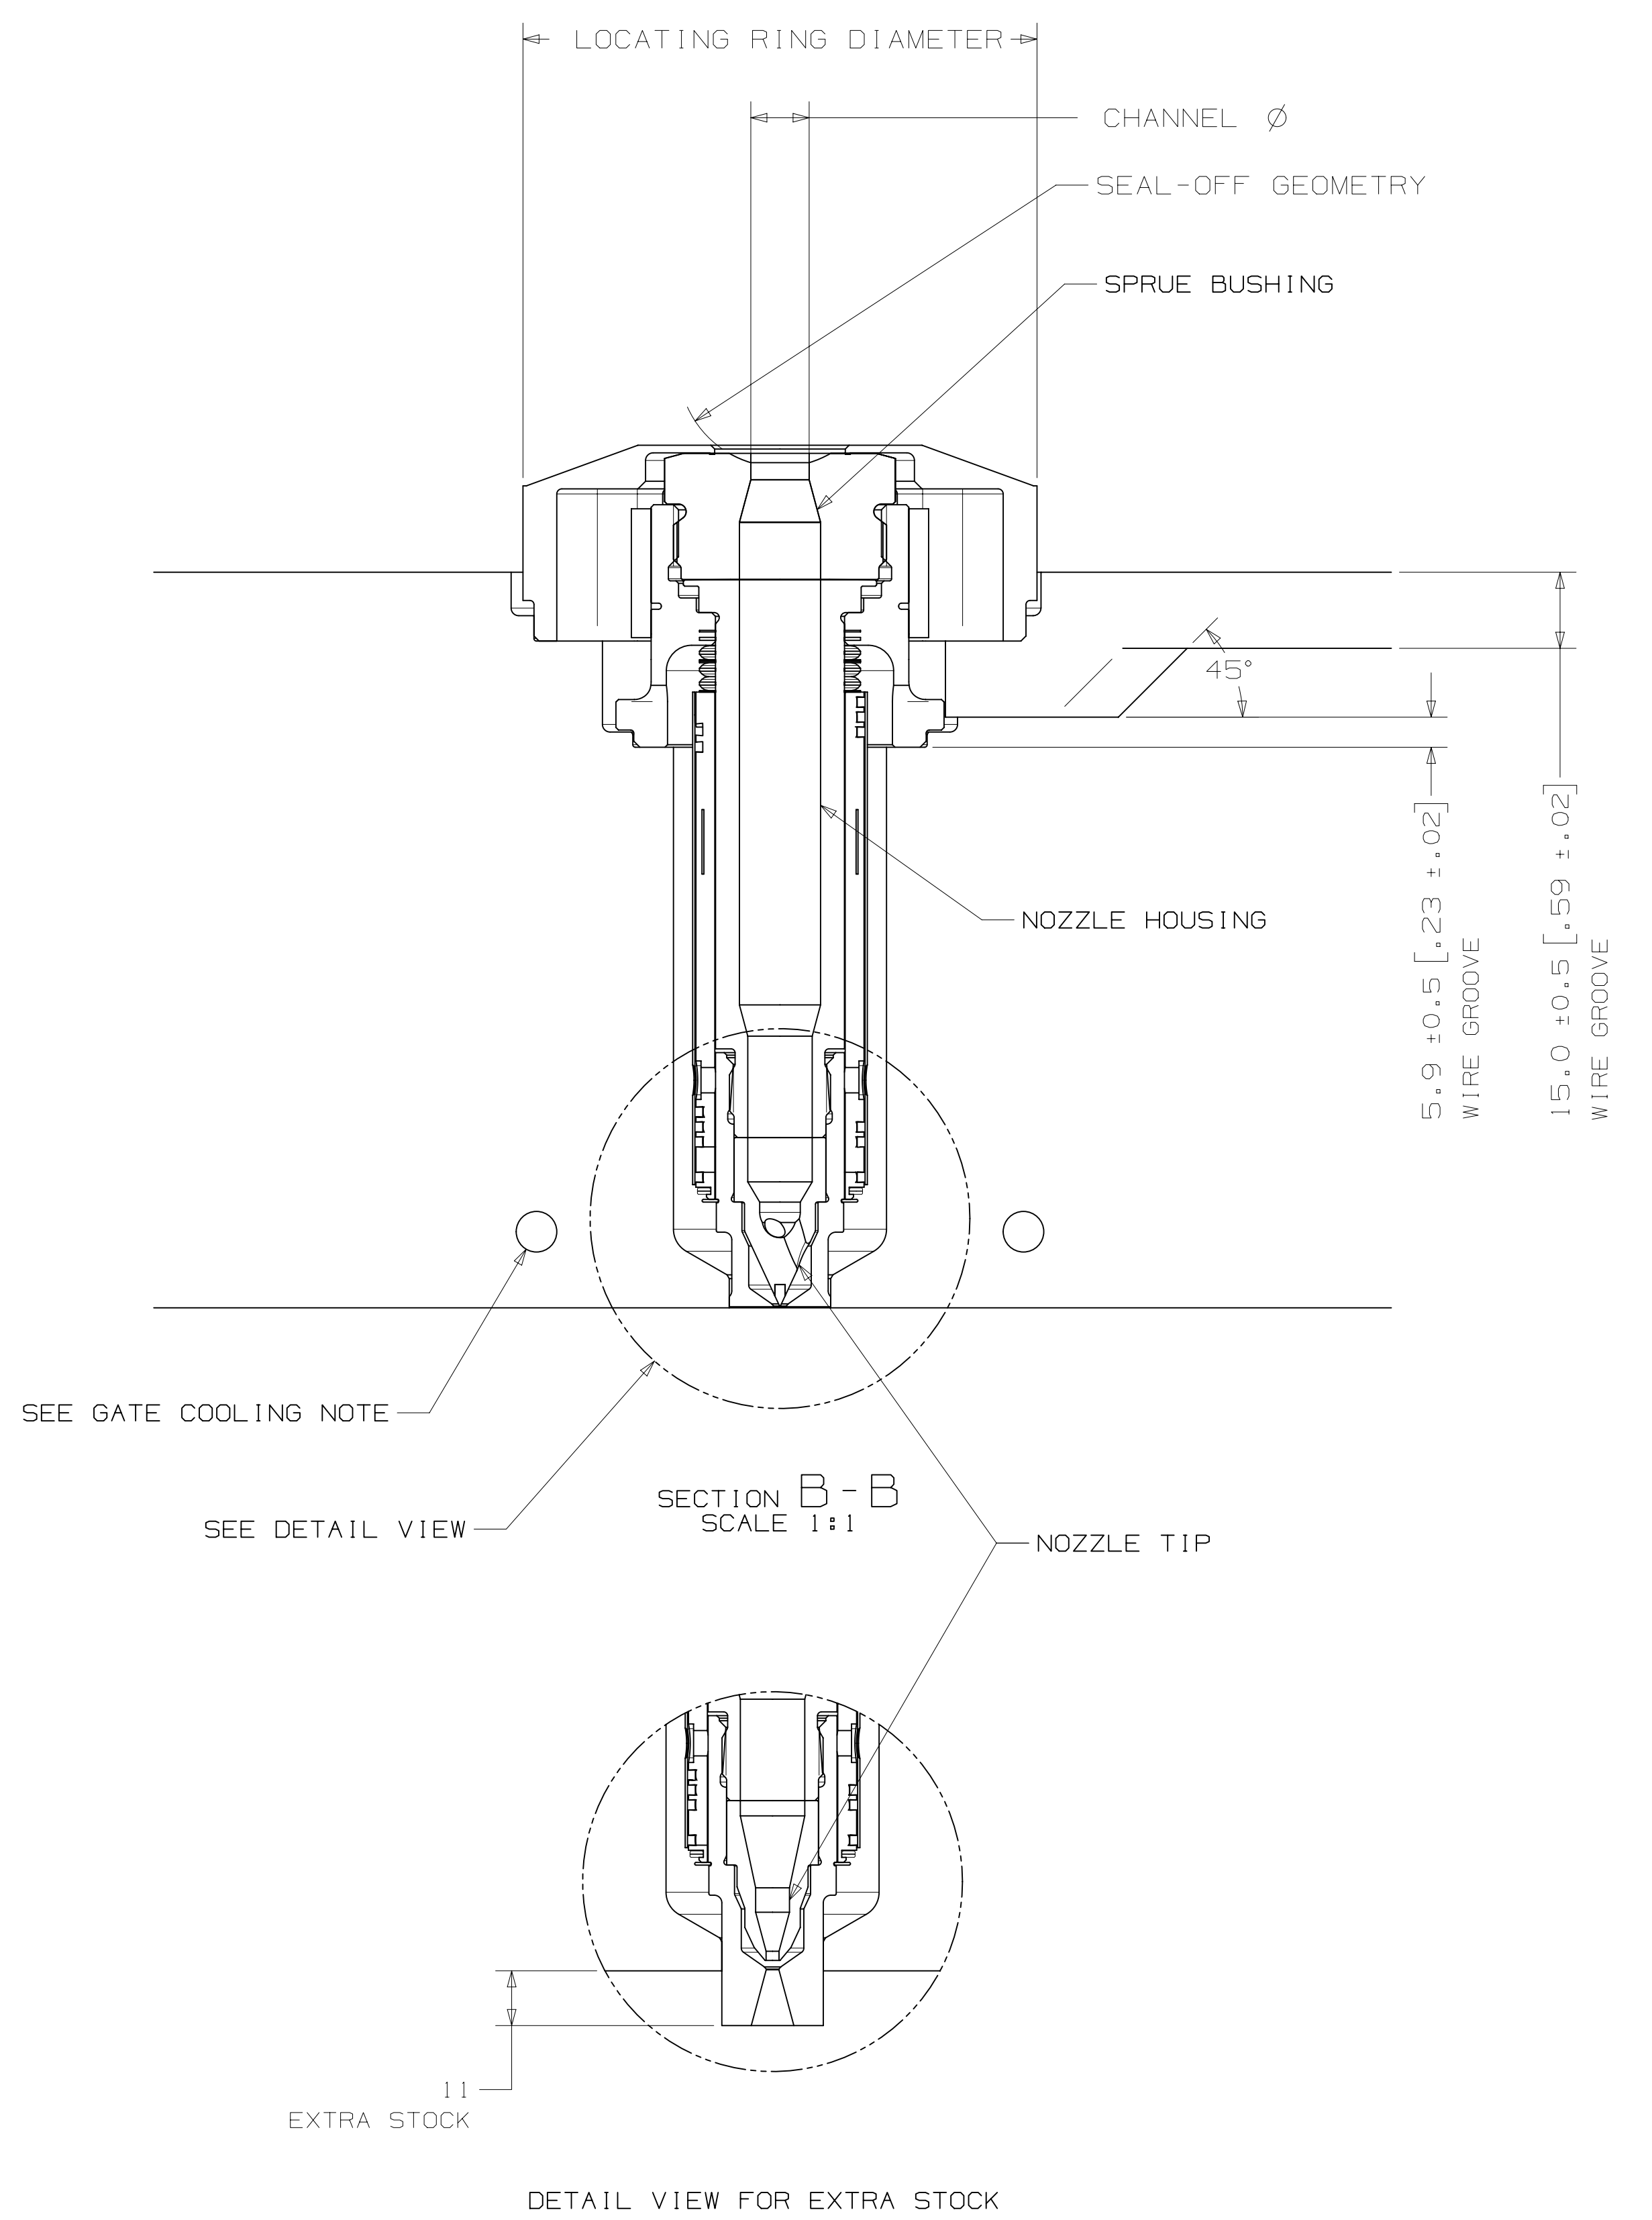
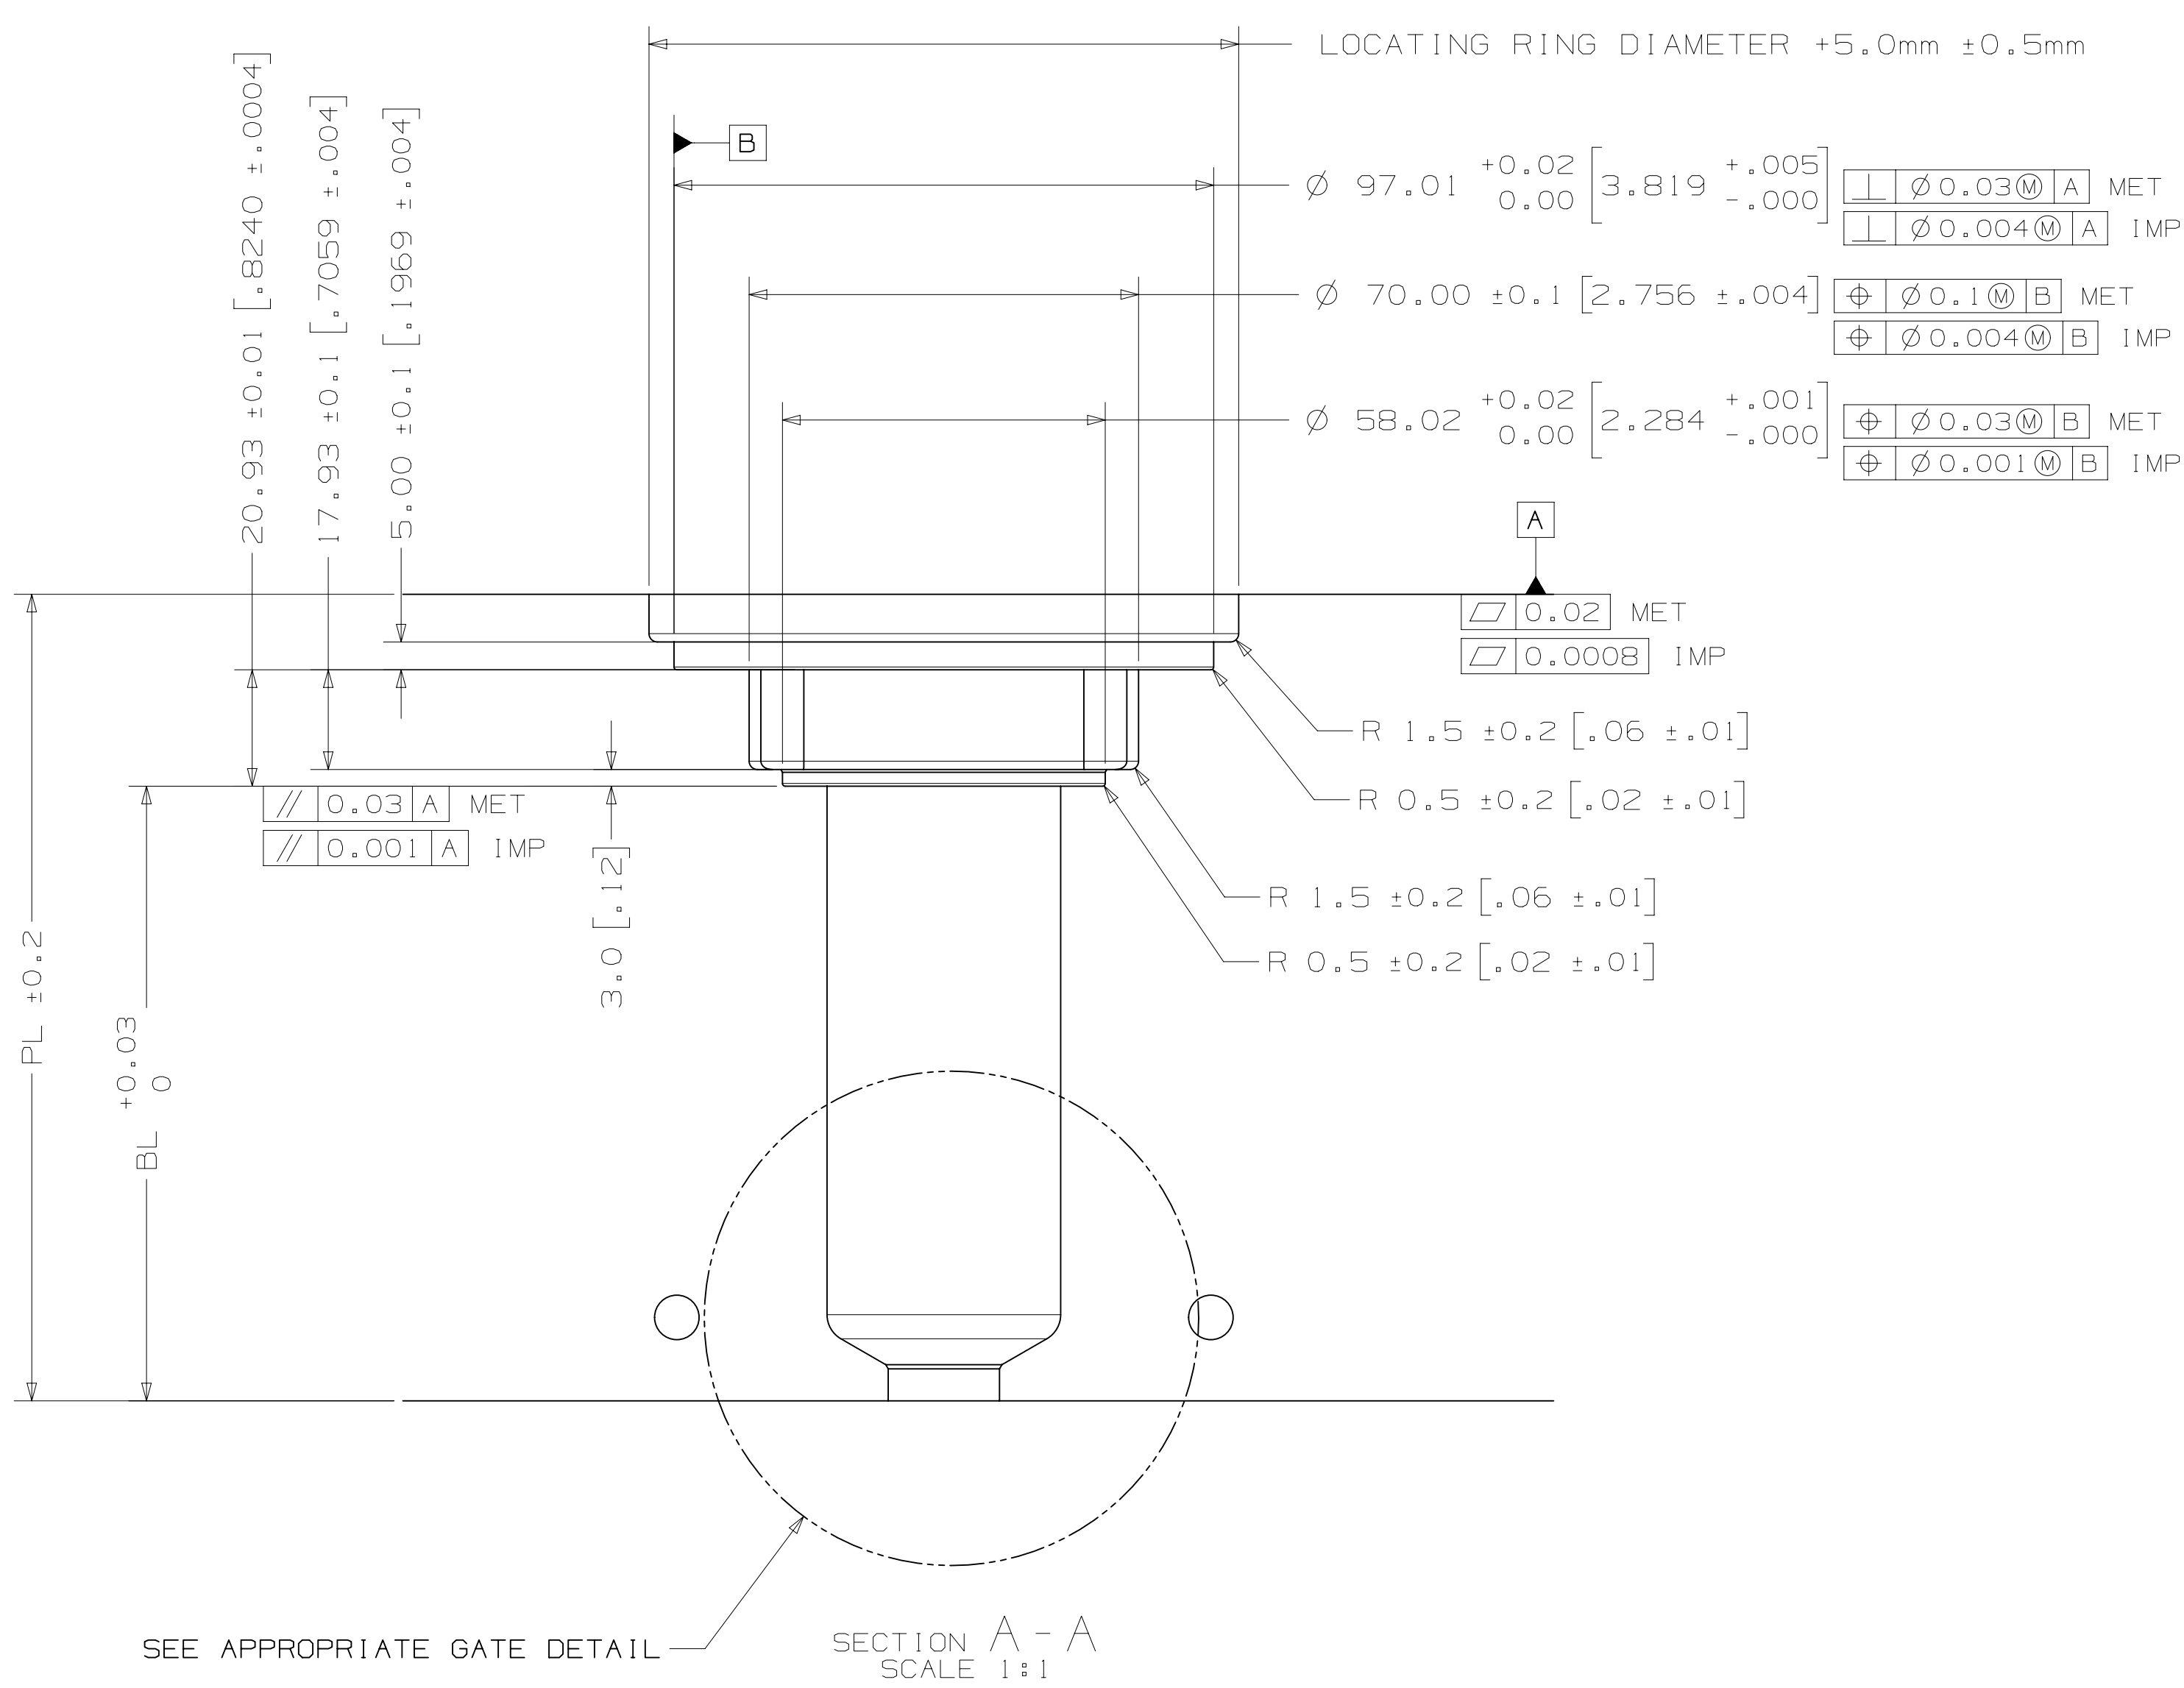


# INSTALLATION DRAWING

REV 3  
8151196

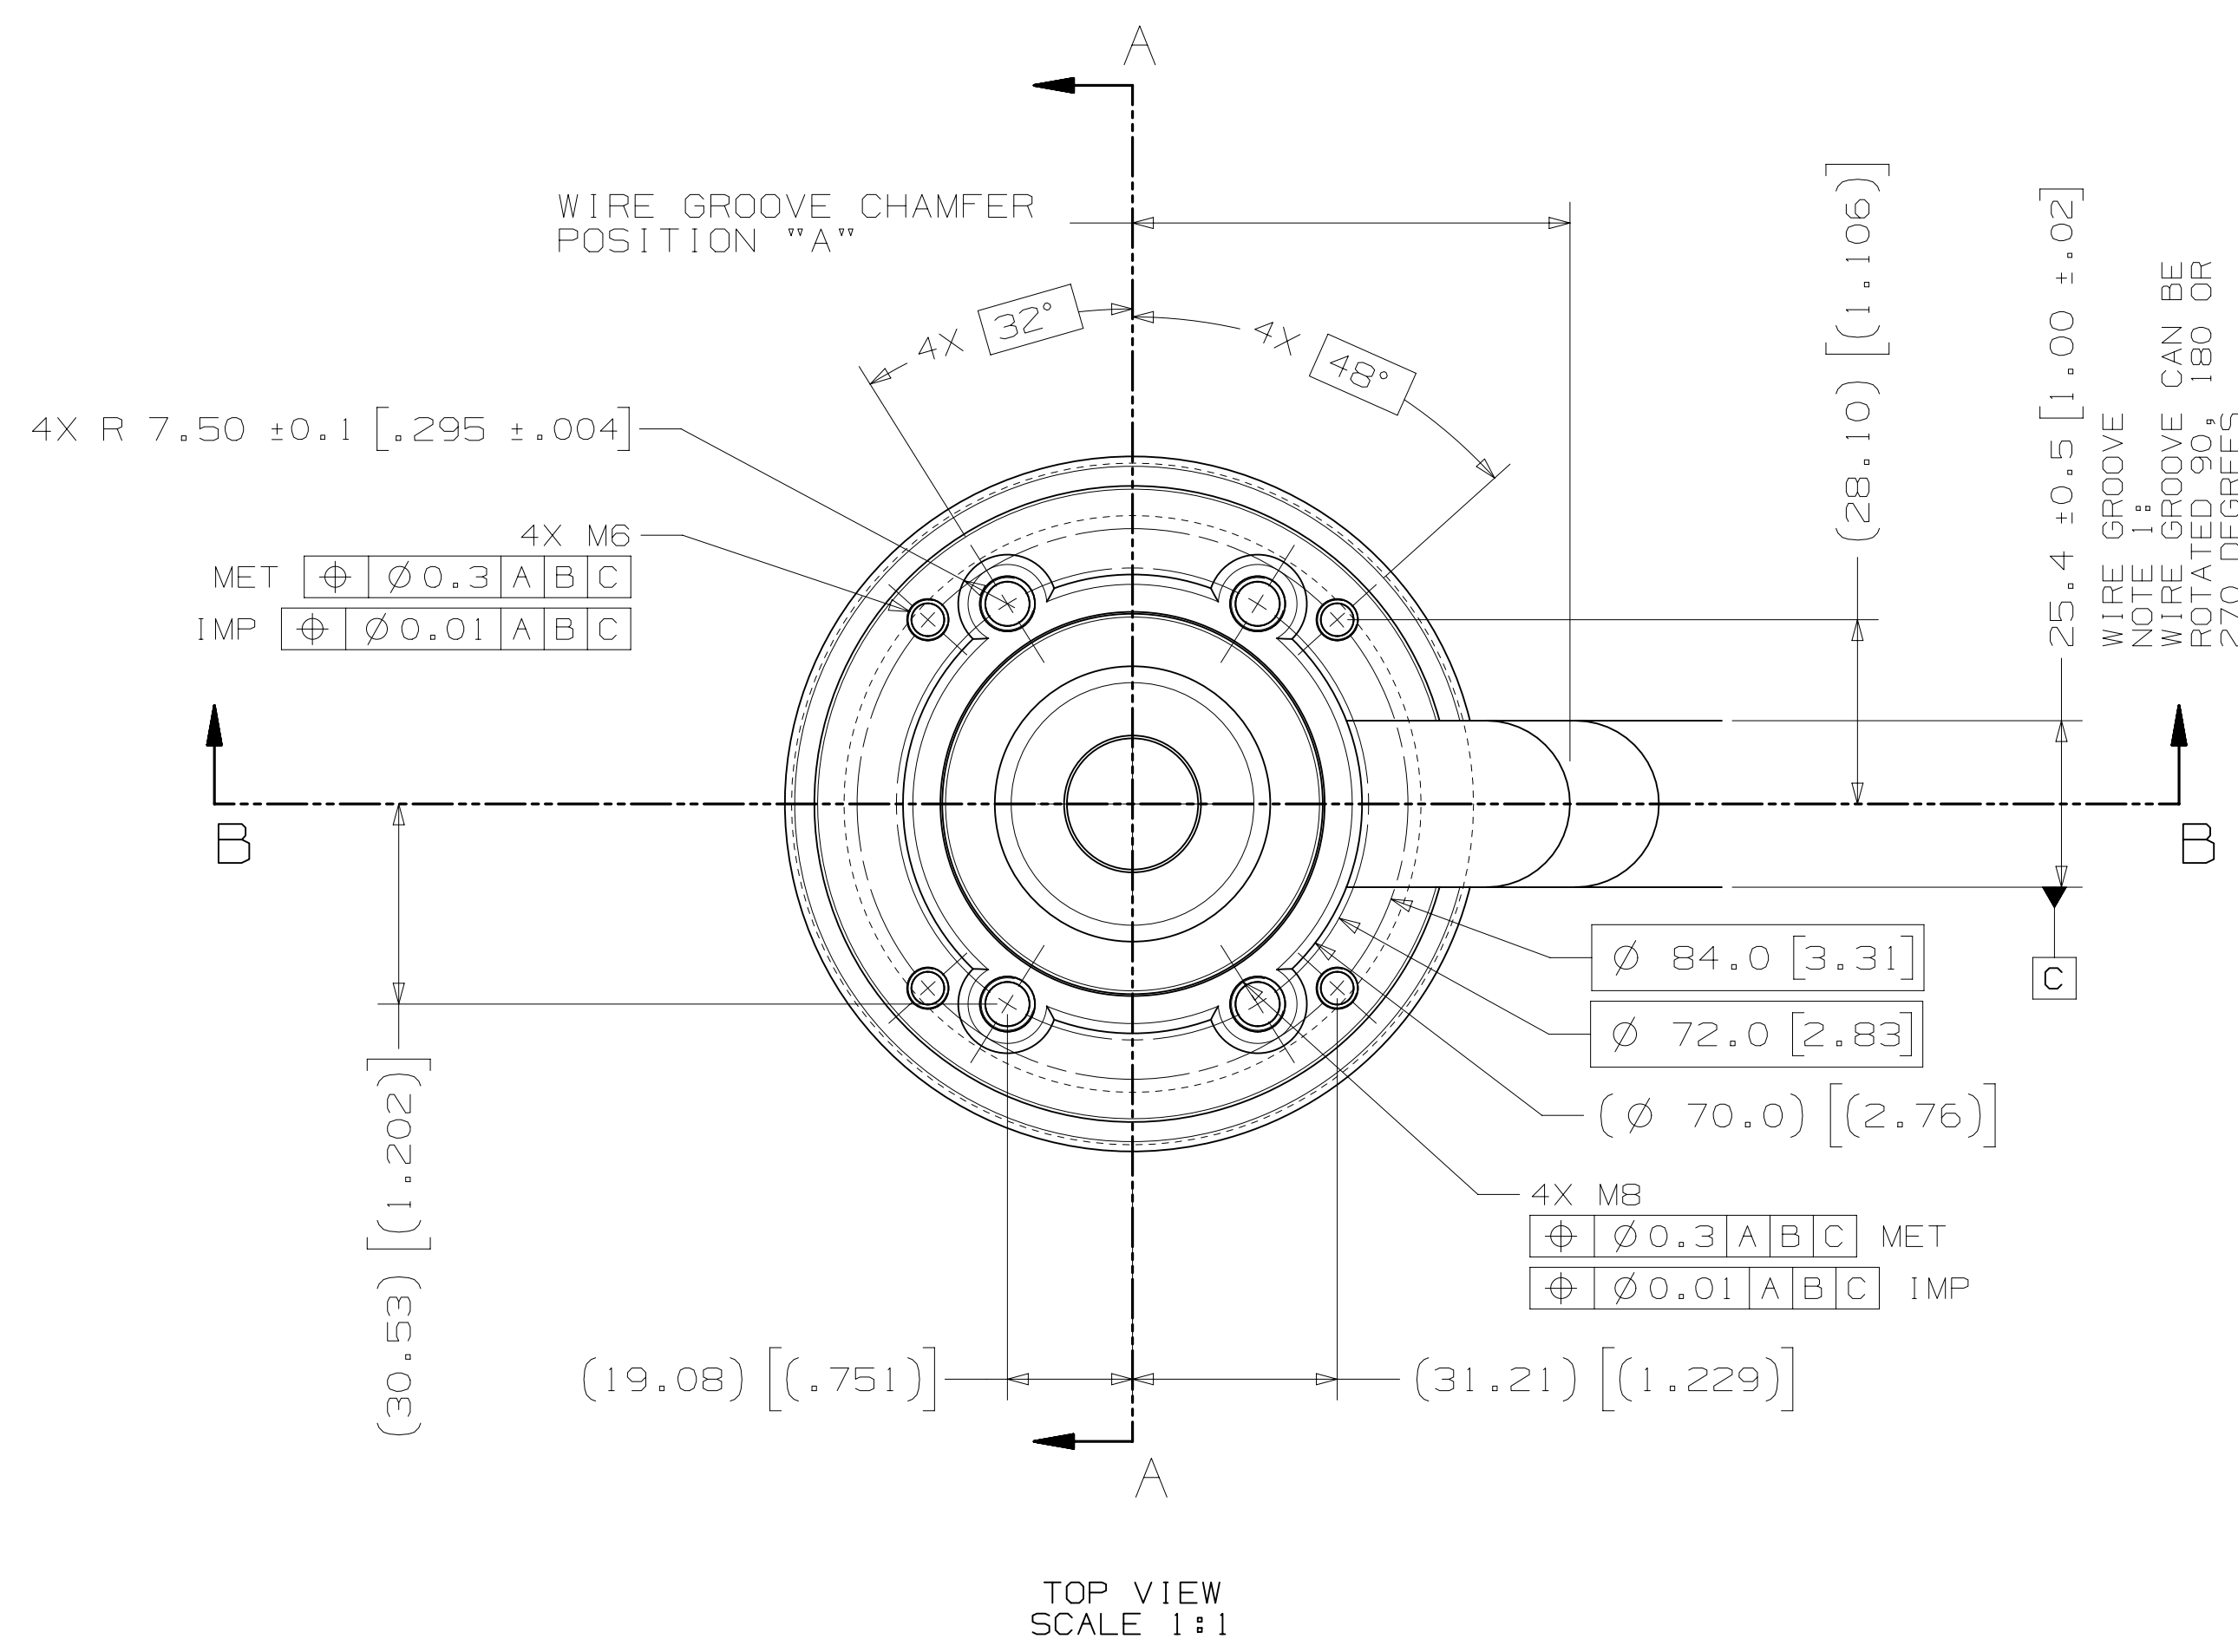

NOZZLE SERIES	NOZZLE TIP	PL RANGE	Approx. BL *
U1000	HT-CAP	96.44 [3.797] - 233.53 [9.194]	71 [2.80] - 190 [7.48]

\* Approx. BL VALUES IN THE TABLE ARE REFERENCES WHICH CAN DEVIATE BY +/-1mm. FINAL BL VALUE CAN BE FOUND ON GATE DETAIL DRAWING AND 3D AFTER FINISHED DESIGN. BL AVAILABLE IN THE INCREMENT OF 10mm WITHIN RANGE.

U1000	SPRUE BUSHING	
	SEAL-OFF GEOMETRY	CHANNEL Ø IN - OUT
	FLAT	6.35 - 16
	FLAT	11.5 - 16.00
	SEAL-OFF 12.7 [1/2]	
	SEAL-OFF 15.5	
SEAL-OFF 19.05 [3/4]		
SEAL-OFF 20		
SEAL-OFF 40		

U1000	LOCATING RING DIAMETER	WIRE GROOVE CHAMFER POSITION "A" (±2.0)
	100	66.7
	101.3 [3.991]	66.7
	125	78.7

DIMENSIONS SHOWN AS: millimeters [inches]

**RECOMMENDED GATE COOLING GUIDELINES**  
ADEQUATE COOLING IS ESSENTIAL FOR THE PROPER FUNCTION OF THIS SYSTEM. REFER TO THE HOT ROLLER PRODUCT GUIDE [www.husky.ca](http://www.husky.ca) FOR MORE DETAILED GUIDELINES.

**RECOMMENDED GATE MATERIAL**  
NOTE: THESE MATERIALS MAY NOT OFFER THE DESIRED RESISTANCE TO ABRASIVE AND/OR CORROSIVE RESINS, FILLERS AND/OR ADDITIVES  
AISI H13 (48-51 Rc)  
AISI 420 (48-51 Rc)

**RECOMMENDED GATE MANUFACTURING GUIDELINES**

- HARDENED GATE INSERTS 148-511 ARE RECOMMENDED WHEN USING SOFTER CAVITY STEELS. SOFTER CAVITIES MAY BE ACCEPTABLE FOR CERTAIN APPLICATIONS. CONTACT YOUR HUSKY REPRESENTATIVE WITH QUESTIONS.
- EDM'ING THE GATE AREA CAUSES MICRO CRACKS WHICH LEAD TO BRITTLE GATE FAILURES. ALSO - DO NOT EDM THE MOLDING SURFACE WITHIN 2mm OF THE GATE HOLE.
- MACHINE THE GATE HOLE AFTER HARDENING TO AVOID EXCESSIVE QUENCH IN THE THIN SECTION DURING HEAT TREAT & RESULTING OVERHARDENING IN THE GATE AREA.
- RECESSED GATES ON THE PRODUCT REDUCE THE GATE AREA STRENGTH LEADING TO GATE FAILURES.
- WELDING THE GATE AREA INCREASES STRESSES AT THE GATE. SOFTENING THE AREA AROUND THE WELD AND CAN CAUSE GATE FAILURES.


FOR TORQUE SPECIFICATIONS, REFER TO HS 252

**HUSKY**  
TITLE: HOT SPRUE  
U1000-HT-CAP  
SCALE: NONE  
SIZE: AOR  
DRAWING: 8151196  
REV: 3

WEIGHT: - kg

# ASSEMBLY DRAWING

REV 3  
DRAWING 8151196

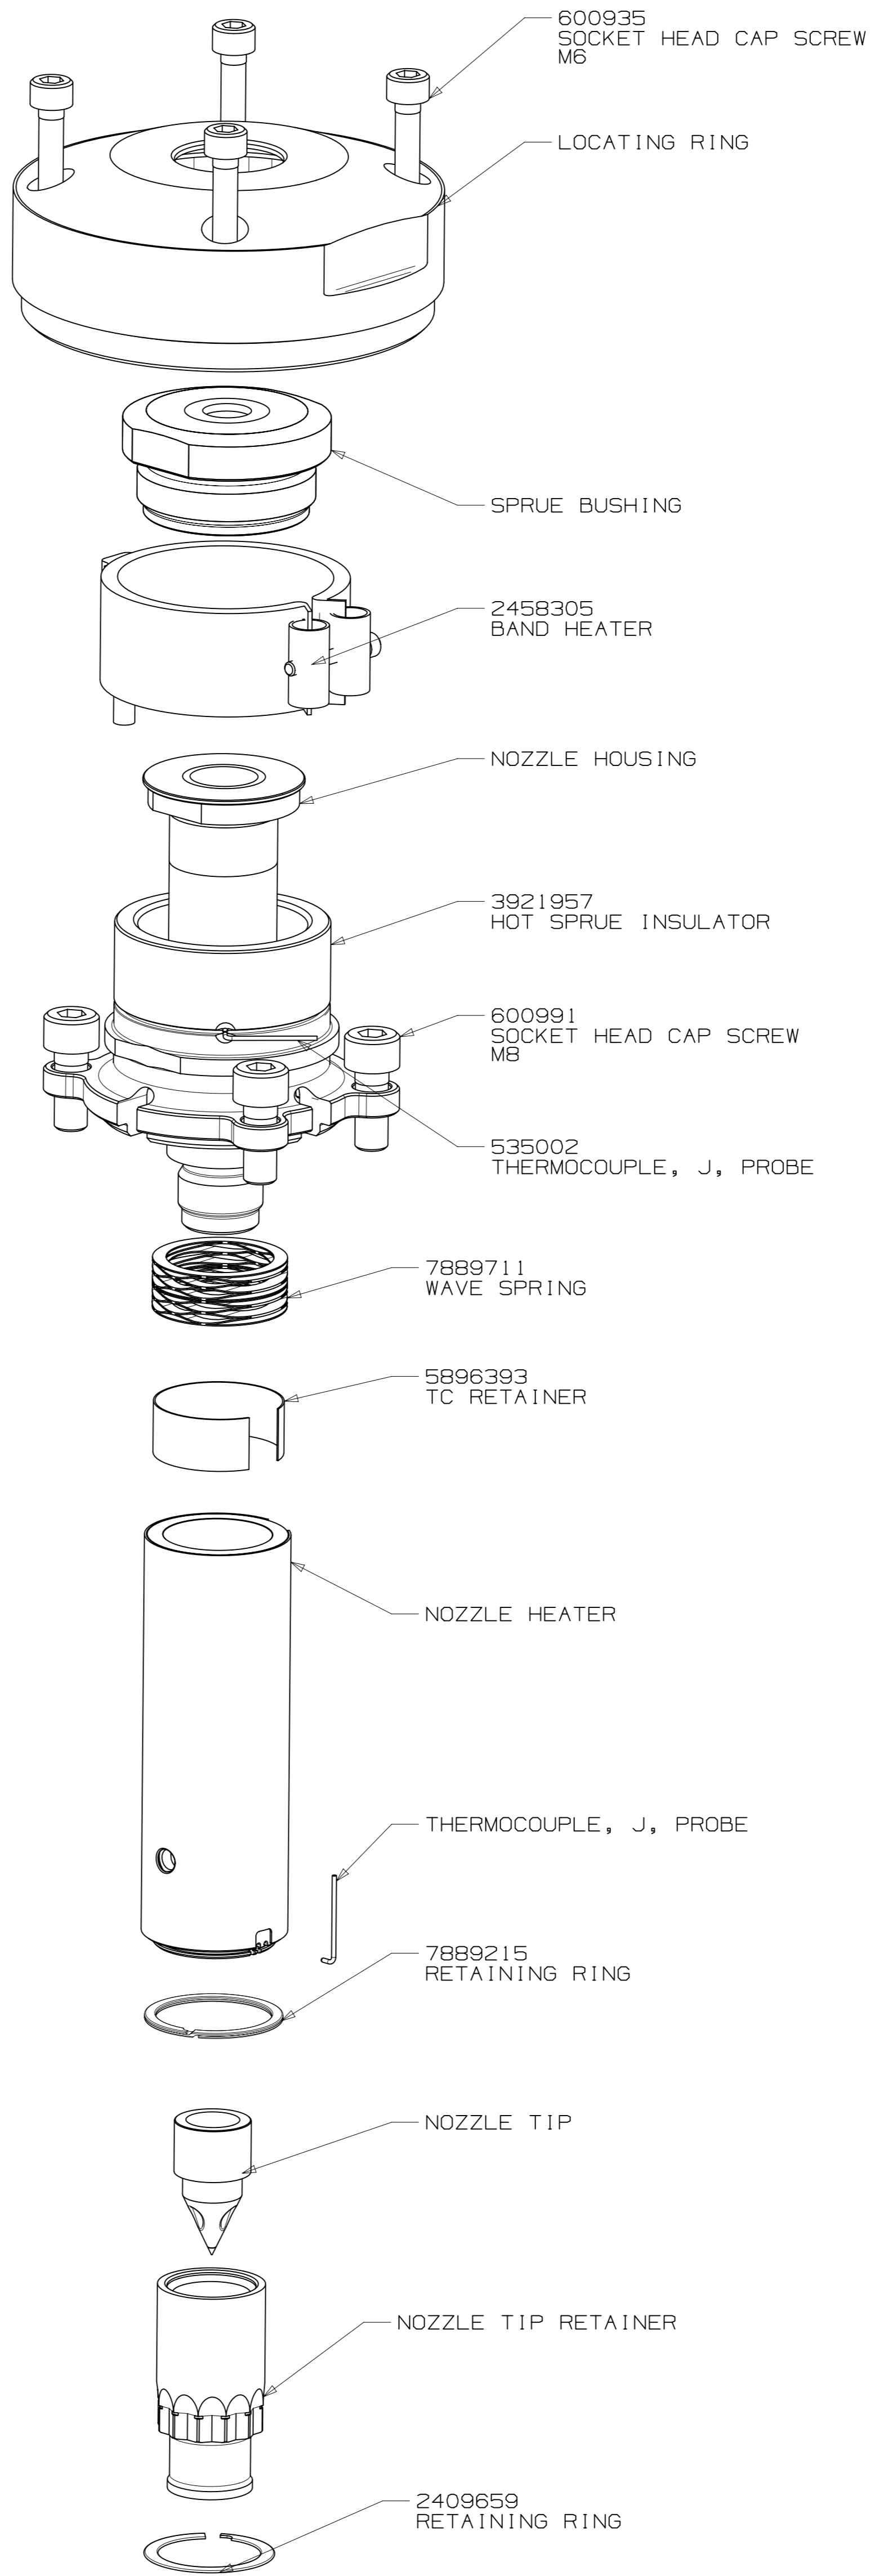

EXPLODED VIEW  
SCALE 1:1

UNLESS OTHERWISE SPECIFIED  
TORQUE TO HUSKY SPECIFICATION  
HS 252

PRELOAD CLASS HGT-80

SIZE	Nm	lb-ft
#8	5	4
#10	7	5
1/4	16	12
5/16	35	25
3/8	60	45
7/16	95	70
1/2	150	110
5/8	290	210
3/4	500	360
7/8	790	580
1	1180	865
M4	4.6	3.4
M5	9.5	7.1
M6	16	12
M8	39	29
M10	77	57
M12	135	100
M14	215	160
M16	330	245
M20	650	480
M24	1100	810

ELECTRICAL INFO (240 VAC)	
ZONE	ZONE DESCRIPTION
1	SPRUE BODY
2	NOZZLE TIP
T/C LEADS: WHITE = (+) RED = (-)	
<b>RECOMMENDED GATE COOLING GUIDELINES</b> ADEQUATE COOLING IS ESSENTIAL FOR THE PROPER FUNCTION OF THIS SYSTEM. REFER TO THE HOT RUNNER PRODUCT GUIDE FOR MORE DETAILED GUIDELINES. <a href="http://www.husky.ca">www.husky.ca</a>	
<b>RECOMMENDED GATE MATERIAL</b> NOTE: THESE MATERIALS MAY NOT OFFER THE DESIRED RESISTANCE TO ABRASIVE AND/OR CORROSIVE RESINS, FILLERS AND/OR ADDITIVES AISI H13 (49-51 Rc) AISI 420 (49-51 Rc)	
<b>RECOMMENDED GATE MANUFACTURING GUIDELINES</b> - HARDENED GATE INSERTS (49-51) ARE RECOMMENDED WHEN USING SOFTER CAVITY STEELS. SOFTER CAVITIES MAY BE ACCEPTABLE FOR CERTAIN APPLICATIONS. CONTACT YOUR HUSKY REPRESENTATIVE WITH QUESTIONS. - EDM'ING THE GATE AREA CAUSES MICRO CRACKS WHICH LEAD TO BRITTLE GATE FAILURES. ALSO - DO NOT EDM THE MOLDING SURFACE WITHIN 2mm OF THE GATE HOLE. - MACHINE THE GATE HOLE AFTER HARDENING TO AVOID EXCESSIVE QUENCH IN THE THIN SECTION DURING HEAT TREAT & RESULTING OVERHARDENING IN THE GATE AREA. - RECESSED GATES ON THE PRODUCT REDUCE THE GATE AREA STRENGTH LEADING TO GATE FAILURES. - WELDING THE GATE AREA INCREASES STRESSES AT THE GATE, SOFTENS THE AREA AROUND THE WELD AND CAN CAUSE GATE FAILURES.	

FOR TORQUE SPECIFICATIONS, REFER TO HS 252	METRIC								
		TITLE HOT SPRUE U1000-HT-CAP							
WEIGHT	- kg	SCALE	NONE	SIZE	AIR	DRAWING	8151196	REV	3
		SHEET 2 OF 2							